

## S22H 系列弹簧驱动电缆卷筒



技术参数: Technical parameters:

材料及构造: 卷筒本体及安装法兰采用钢件制造。弹簧为高寿命高等级的弹簧钢。

Materials & Structure: The drum body and mounting flange are made of steel. Spring is the high life high-grade spring steel.

卷绕速度: 水平卷绕 63m/min 垂直卷绕 30m/min

Winding speed: Horizontal : 63m/min Vertical winding: 30m/min

卷取长度: 水平最大卷绕长度: 30 米, 垂直最大卷绕长度 15 米

Winding length: The Max Horizontal winding length: 30m, The Max Vertical winding length: 15m

电缆参数: 外径 Max  $\Phi 15\text{mm}$ , 重量 Max 0.55kg/m;


Cable Spec: MaxOD:  $\Phi 15\text{mm}$ , Max weight: Max 0.55kg/m;


电气参数:  $V_{\text{max}} 500\text{V}$ ,  $I_{\text{max}} 40\text{A}$

Electric parameter:  $V_{\text{max}} 500\text{V}$ ,  $I_{\text{max}} 40\text{A}$

防护等级: IP54

Grade: IP54

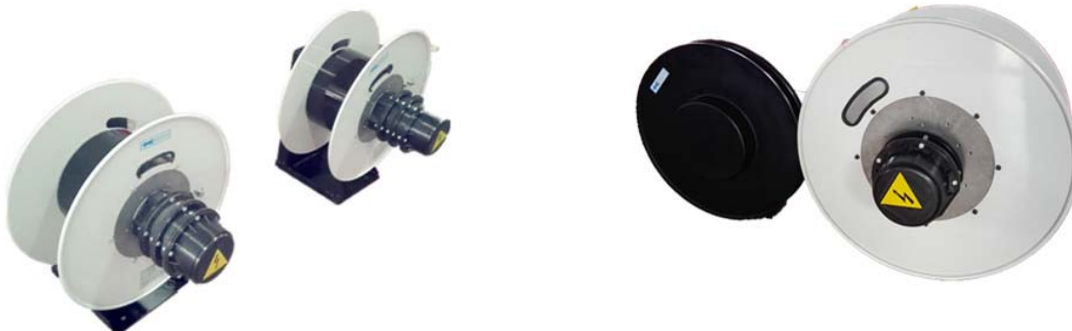

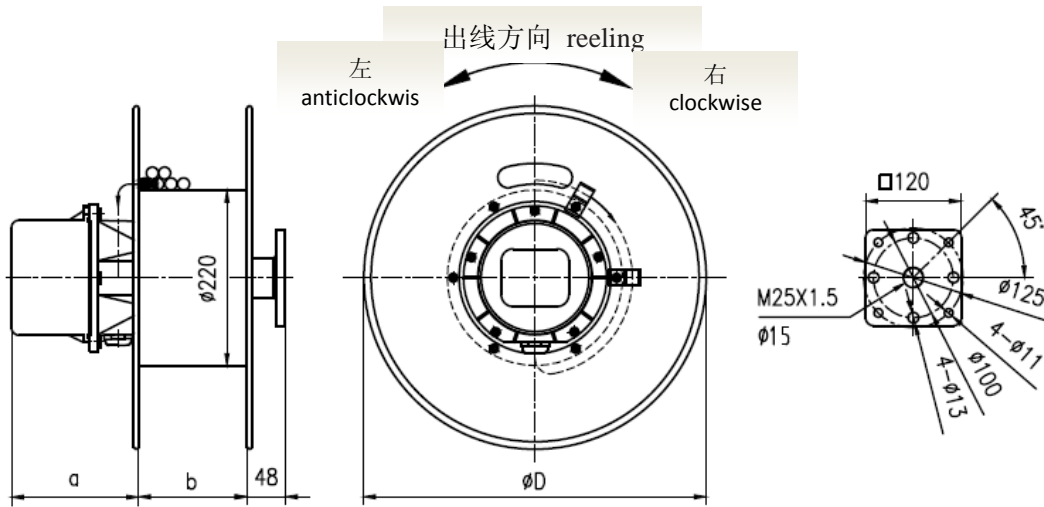**S22H 型选型表**
**S22H type Selection Tables for Reels**

 Application: **A** Vertical      **D** Horizontal and Vertical Retrieval

电缆 Cable	卷取 方式	电缆长度 Lw/Li (m)	卷筒型号 Reel type	D (mm)	a (mm)	b (mm)	滑环箱 Slipring- body	法兰 Flange type
4×1.5mm <sup>2</sup> Φ9.2mm 0.133kg/m	A	9/1.5	S22H3016-0204-1A	300	175	165	1	1.1
	D	9/1.5						
	A	18/1.5	S22H3316-0204-2S	330	175	165	1	1.1
	D	18/1.5						
	A	27/1.5	S22H3616-0204-3S	360	175	165	1	1.1
	D	27/1.5						
D	35/1.5	S22H3620-0204-4S	360	175	200	1	1.1	
5×1.5mm <sup>2</sup> Φ10.1mm 0.143kg/m	A	9/1.5	S22H3016-0205-1A	300	175	165	1	1.1
	D	9/1.5						
	A	18/1.5	S22H3616-0205-2S	360	175	165	1	1.1
	D	18/1.5						
	A	25/1.5	S22H3616-0205-3S	360	175	165	1	1.1
	D	27/1.5						
D	35/1.5	S22H3620-0205-4S	360	175	200	1	1.1	
7×1.5mm <sup>2</sup> Φ11 mm 0.19kg/m	A	9/1.5	S22H30165-0207-1A	300	220	165	1	1.1
	D	9/1.5						
	A	20/1.5	S22H36165-0207-2S	360	220	165	1	1.1
	D	20/1.5						
	A	27/1.5	S22H3616-0207-3S	360	220	165	1	1.1
	D	27/1.5						
D	35/1.5	S22H3620-0207-4S	360	220	200	1	1.1	

电缆 Cable	卷取 方式	电缆长度 Lw/Li (m)	卷筒型号 Reel type	D (mm)	a (mm)	b (mm)	滑环箱 Slipring- body	法兰 Flange type
4×2.5mm <sup>2</sup> Φ10mm 0.179kg/m	A	9/1.5	S22H3016-0204-1A	300	175	165	1	1.1
	D	9/1.5						
	A	20/1.5	S22H3016-0204-2S	300	175	165	1	1.1
		D						
	A	27/1.5	S22H3616-0204-3S	360	175	165	1	1.1
		D						
D	35/1.5	S22H3620-0204-4S	360	175	200	1	1.1	
5×2.5mm <sup>2</sup> Φ12mm 0.22kg/m	A	9/1.5	S22H3016-0205-1A	300	175	165	1	1.1
	D	9/1.5						
	A	20/1.5	S22H3616-0205-2S	360	175	165	1	1.1
		D						
	A	27/1.5	S22H4316-0205-3S	430	175	165	1	1.1
		D						
D	35/1.5	S22H4320-0205-4S	430	175	200	1	1.1	
7×2.5mm <sup>2</sup> Φ14.8mm 0.334kg/m	A	9/1.5	S22H3616-0207-1A	360	220	165	1	1.1
	D	9/1.5						
	A	16/1.5	S22H4316-0207-2S	430	220	165	1	1.1
		D						
	D	27/1.5	S22H4316-0207-3S	430	220	165	1	1.1
	D	35/1.5	S22H4320-0207-4S	430	220	200	1	1.1
4×4mm <sup>2</sup> Φ14mm 0.322kg/m	A	9/1.5	S22H3616-0204-1A	360	175	165	1	1.1
	D	9/1.5						
	A	16/1.5	S22H4316-0204-2S	430	175	165	1	1.1
		D						
	D	27/1.5	S22H4316-0204-3S	430	175	165	1	1.1
	D	35/1.5	S22H4320-0204-4S	430	174	200	1	1.1
5×4mm <sup>2</sup> Φ15.3mm 0.353kg/m	A	9/1.5	S22H3616-0205-1A	360	175	165	1	1.1
	D	9/1.5						
	A	16/1.5	S22H3616-0205-2S	360	175	165	1	1.1
		D						
	D	27/1.5	S22H4316-0205-3S	430	175	165	1	1.1
	D	35/1.5	S22H4320-0205-4S	430	175	200	1	1.1
4×6mm <sup>2</sup> Φ16.5mm 0.463kg/m	A	9/1.5	S22H3616-0204-1A	360	175	165	1	1.1
	D	9/1.5						
	A	12/1.5	S22H3616-0204-2S	360	175	165	1	1.1
		D						
	D	27/1.5	S22H4316-0204-3S	430	175	165	1	1.1
	D	35/1.5	S22H4320-0204-4S	430	175	200	1	1.1



**湖南海润电气有限公司**

Hunan Hairun Electric Co., Ltd.

---

地址：湖南省岳阳市麻塘镇

Address: Ma Town, Yueyang City, Hunan Province

电话 (Tel): +86-730-7830777 7832777

传真 (Fax): +86-730-7831777

邮箱 (Email): [gs@hinar.com.cn](mailto:gs@hinar.com.cn)

网址 (Website): <http://www.hinar.com.cn>